

TVRDOKOVOVÁ FRÉZA **GP**

P
OCEL

K
LITINA

M
NEREZ

VHM
microzrnny
tvrdokov

ALCRONA

**Werks-
norm**

**ZUBY
4**

**35°
38°**
šroubovice

λ

**Zentrum-
schnitt**



**6535 HB-
Schaft**

prom nlivá šroubovice 35°/38°

VĚTŠÍ HLOUBKA ŘEZU


VYSOKÝ ŘEZNÝ VÝKON

PERFEKTNÍ STABILITA PŘI OBRÁBĚNÍ

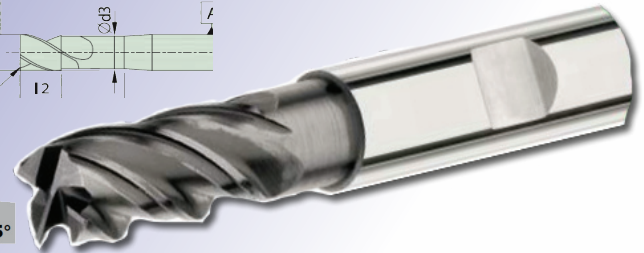

Kat.-Code - 175487

CODE	d, mm	cena v Kč	F mm	l ₁ mm	l ₂ mm	l ₄ mm	d ₂ (h6) mm	d ₃ mm	Z
175487 3,00	3,00	315,-	0,13	57	8	18	6	2,8	4
175487 4,00	4,00	315,-	0,15	57	11	21	6	3,6	4
175487 5,00	5,00	315,-	0,15	57	13	21	6	4,6	4
175487 6,00	6,00	315,-	0,20	57	13	21	6	5,5	4
175487 8,00	8,00	436,-	0,20	63	19	27	8	7,5	4
175487 10,0	10,0	630,-	0,30	72	22	32	10	9,5	4
175487 12,0	12,0	872,-	0,30	83	26	38	12	11,5	4
175487 16,0	16,0	1 381,-	0,40	92	32	44	16	15,5	4
175487 20,0	20,0	2 399,-	0,50	104	38	54	20	19,5	4
175487 SET		2 250,-	4 dílná sada 6 8 10 12						

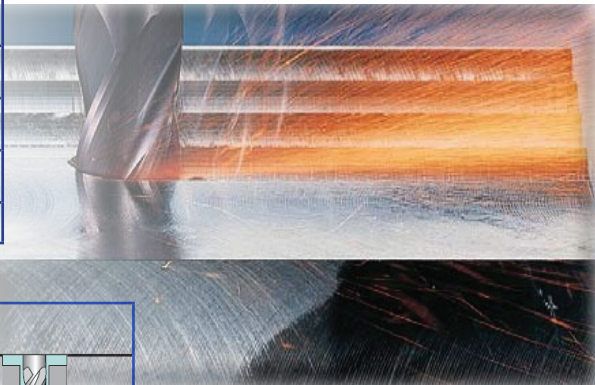

Použití a rezné podmínky

ISO	Materiál	Pevnost N/mm ²	typ frézování a posuvy Vc(m/min)		
			ae < 0.25 x d	ae < 0.5 x d	ae < 1 x d
P OCEL	St52,St37,C45,16MnCr5	< 850	280	230	180
	1.2367,1.2379,1.2363,42CRM04	< 1200	160	150	110
M NEREZ	1.4305,14301,14034	< 750	140	110	
	1.4435,1.4571	< 850	100	80	
K LITINA	GG20,GG40,GTW-45-07,GGG40	< 450	200	160	130
	GGG60,GGG70	< 450	160	140	110

